

INFORMATION

The Wirehanger is a hammer in fixing for use in non-structural applications. The fast and easy installation along with auto expansion feature provide a rapid secure fixing. It could be used in:

- Suspended ceiling hangers
- Suspended cables
- Bird wires

BASE MATERIAL

- Non-Cracked Solid Concrete
- Hard Concrete Block
- Hard Natural Stone
- Solid Brick

FEATURES

- Pull Down Expansion
- Through Fixing
- Fast And Secure Installation
- Hammer In Fixing
- Reaction to Fire Class A1
- Zinc Plated And Yellow Passivated (Minimum 5µm)

RELATED PRODUCTS





SD06


SDS+ Drill Bits

RANGE AND LOAD DATA


RANGE AND LOAD DATA(C20/25 CONCRETE)

Part Number	Drill Hole Diam	Hole Depth	Overall Length	Eye Diameter	Recommended Tensile Resistance
	(d_o)	(h_1)	(L)	(d_{eye})	(N_{Re})
	mm	mm	mm	mm	kN
Wirehanger					
TW06055	6	40	55	6	1.5

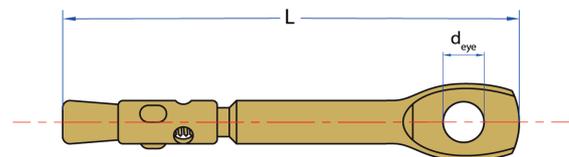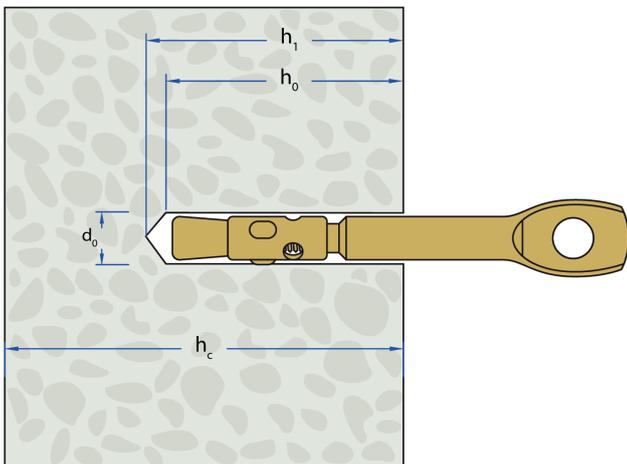



INSTALLATION INSTRUCTIONS

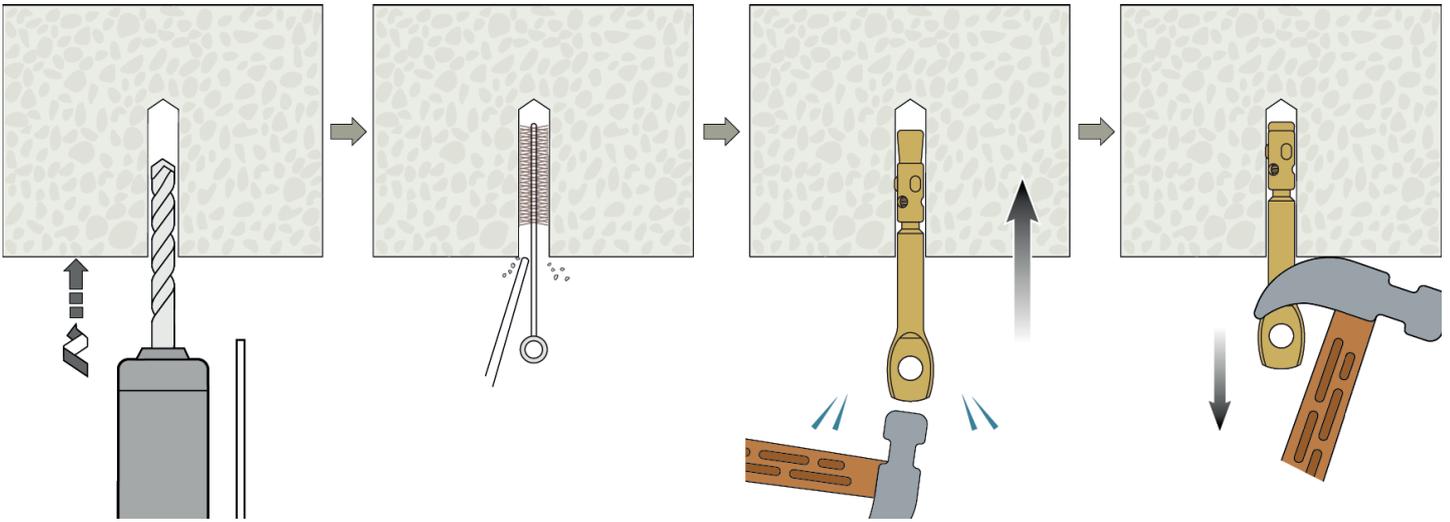

-Drill correct diameter hole to corresponding depth

-Clean hole by brushing and blowing to remove drilling debris and dust

-Insert anchor into concrete by using a suitable hammer

-Pull the anchor firmly down by using a claw hammer

For variations in structure thickness, reduced spacing and edge calculations download the free **Anchor Calculation Program** from www.jcpfixings.co.uk

